


Řemenice HTD 8M

standardní program PL

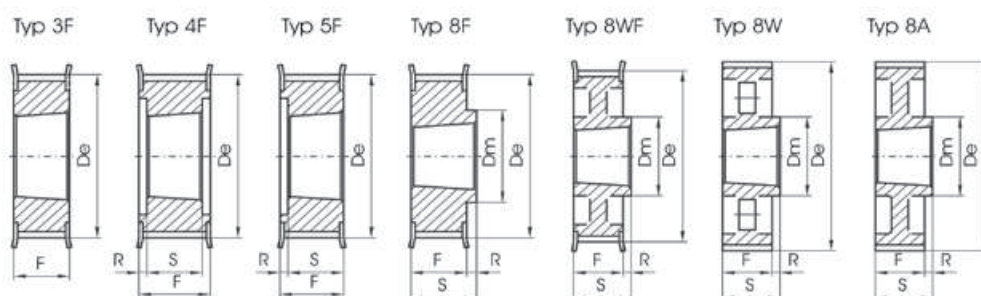

Počet zubů -označení	Hlavový průměr ozubení	Vnější průměr čel	Tvar	Vložka	Max. průměr hřídele	Dm	F	S	R	Hmotnost kg
-------------------------	------------------------------	-------------------------	------	--------	---------------------------	----	---	---	---	----------------

HTD 8M-20 pro řemeny šířky 20 mm

Materiál: šedá litina

PL22-8M-20	54,65	60,0	5F	1008	25	-	28	22	6	0,24
PL24-8M-20	59,75	66,0	5F	1108	28	-	28	22	6	0,30
PL26-8M-20	64,84	71,0	5F	1108	28	-	28	22	6	0,36
PL28-8M-20	70,08	75,0	5F	1108	28	-	28	22	6	0,44
PL30-8M-20	75,13	83,0	5F	1108	28	-	28	22	6	0,53
PL32-8M-20	80,16	87,0	5F	1610	42	-	28	25	3	0,42
PL34-8M-20	85,22	91,0	5F	1610	42	-	28	25	3	0,55
PL36-8M-20	90,30	98,5	5F	1610	42	-	28	25	3	0,68
PL38-8M-20	95,39	103,0	5F	1610	42	-	28	25	3	0,80
PL40-8M-20	100,49	106,0	5F	1610	42	-	28	25	3	1,00
PL44-8M-20	110,67	119,0	8F	2012	50	93	28	32	4	1,20
PL48-8M-20	120,86	127,0	8F	2012	50	96	28	32	4	1,60
PL56-8M-20	141,23	148,0	8F	2012	50	110	28	32	4	2,40
PL64-8M-20	161,60	168,0	8WF	2012	50	110	28	32	4	2,70
PL72-8M-20	181,97	192,0	8WF	2012	50	110	28	32	4	3,30
PL80-8M-20	202,35	-	8W	2012	50	110	28	32	4	3,50
PL90-8M-20	227,81	-	8A	2012	50	110	28	32	4	3,65


HTD 8M-30 pro řemeny šířky 30 mm

Materiál: šedá litina

PL22-8M-30	54,65	60,0	5F	1008	25	-	38	22	16	0,29
PL24-8M-30	59,75	66,0	5F	1108	25	-	38	22	16	0,38
PL26-8M-30	64,84	71,0	5F	1108	25	-	38	22	16	0,45
PL28-8M-30	70,08	75,0	5F	1210	32	-	38	25	13	0,50
PL30-8M-30	75,13	83,0	3F	1615	42	-	38	38		0,55
PL32-8M-30	80,16	87,0	3F	1615	42	-	38	38		0,59
PL34-8M-30	85,22	91,0	3F	1615	42	-	38	38		0,77
PL36-8M-30	90,30	98,5	3F	1615	42	-	38	38		0,96
PL38-8M-30	95,39	103,0	3F	1615	42	-	38	38		1,15
PL40-8M-30	100,49	106,0	3F	1615	42	-	38	38		1,34
PL44-8M-30	110,67	119,0	4F	2012	50	-	38	32	3	1,33
PL48-8M-30	120,86	127,0	4F	2012	50	-	38	32	3	1,78
PL56-8M-30	141,23	148,0	4F	2012	50	-	38	32	3	3,76
PL64-8M-30	161,60	168,0	8F	2517	60	125	38	45	7	4,20
PL72-8M-30	181,97	192,0	8WF	2517	60	125	38	45	7	4,30
PL80-8M-30	202,35	-	8W	2517	60	125	38	45	7	4,60
PL90-8M-30	227,81	-	8A	2517	60	125	38	45	7	5,00
PL112-8M-30	283,83	-	8A	2517	60	125	38	45	7	6,20
PL144-8M-30	365,32	-	8A	2517	60	125	38	45	7	9,00

Řemenice HTD 8M

standardní program PL

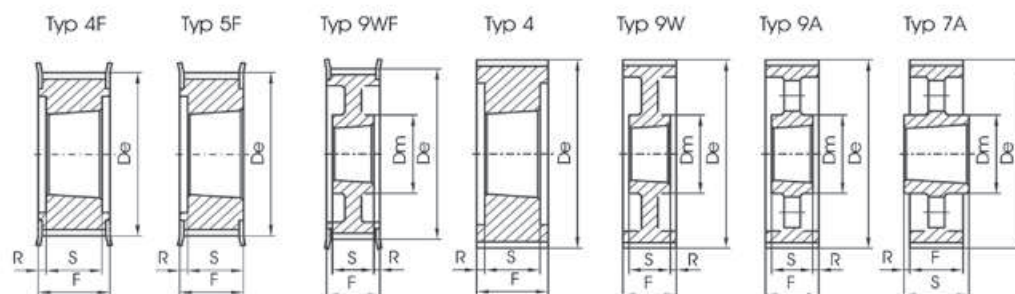

Počet zubů -označení	Hlavový průměr ozubení	Vnější průměr čel	Tvar	Vložka	Max. průměr hřídele	Dm	F	S	R	Hmotnost kg
----------------------	------------------------	-------------------	------	--------	---------------------	----	---	---	---	-------------

HTD 8M-50 pro řemeny šířky 50 mm

Materiál: šedá litina

PL28-8M-50	70,08	75,0	5F	1210	32	-	60	25	35	0,60
PL30-8M-50	75,13	83,0	5F	1615	42	-	60	38	22	0,65
PL32-8M-50	80,16	87,0	5F	1615	42	-	60	38	22	0,82
PL34-8M-50	85,22	91,0	5F	1615	42	-	60	38	22	1,06
PL36-8M-50	90,30	98,5	5F	1615	42	-	60	38	22	1,30
PL38-8M-50	95,39	103,0	5F	1615	42	-	60	38	22	1,60
PL40-8M-50	100,49	106,0	4F	2012	50	-	60	32	14	1,71
PL44-8M-50	110,67	119,0	4F	2012	50	-	60	32	14	1,78
PL48-8M-50	120,86	127,0	4F	2012	50	-	60	32	14	2,30
PL56-8M-50	141,23	148,0	4F	2517	60	-	60	45	7,5	3,40
PL64-8M-50	161,60	168,0	4F	2517	60	-	60	45	7,5	5,00
PL72-8M-50	181,97	192,0	9WF	2517	60	125	60	45	7,5	6,70
PL80-8M-50	202,35	-	4	3020	75	-	60	51	4,5	8,80
PL90-8M-50	227,81	-	9W	3020	75	170	60	51	4,5	10,00
PL112-8M-50	283,83	-	9W	3020	75	170	60	51	4,5	12,00
PL144-8M-50	365,32	-	9A	3020	75	170	60	51	4,5	15,20
PL168-8M-50	426,44	-	7A	3525	90	190	60	65	2,5	16,40
PL192-8M-50	487,55	-	7A	3525	90	190	60	65	2,5	21,80


HTD 8M-85 pro řemeny šířky 85 mm

Materiál: šedá litina

PL34-8M-85	85,22	91,0	4F	1615	42	-	95	38	28,5	1,43
PL36-8M-85	90,30	98,5	4F	1615	42	-	95	38	28,5	1,87
PL38-8M-85	95,39	103,0	4F	1615	42	-	95	38	28,5	2,20
PL40-8M-85	100,49	106,0	4F	2012	50	-	95	32	31,5	1,80
PL44-8M-85	110,67	119,0	4F	2012	50	-	95	32	31,5	2,30
PL48-8M-85	120,86	127,0	4F	2517	60	-	95	45	25	2,66
PL56-8M-85	141,23	148,0	4F	2517	60	-	95	45	25	4,45
PL64-8M-85	161,60	168,0	4F	2517	60	-	95	45	25	6,20
PL72-8M-85	181,97	192,0	4F	3020	75	-	95	51	22	8,00
PL80-8M-85	202,35	-	4	3020	75	-	95	51	22	10,00
PL90-8M-85	227,81	-	9W	3020	75	170	95	51	22	10,80
PL112-8M-85	283,83	-	9W	3020	75	170	95	51	22	15,00
PL144-8M-85	365,32	-	9A	3525	90	190	95	65	15	20,00
PL168-8M-85	426,44	-	9A	3525	90	190	95	65	15	23,00
PL192-8M-85	487,55	-	9A	3525	90	190	95	65	15	28,50

Řemenice HTD 14M

standardní program PL

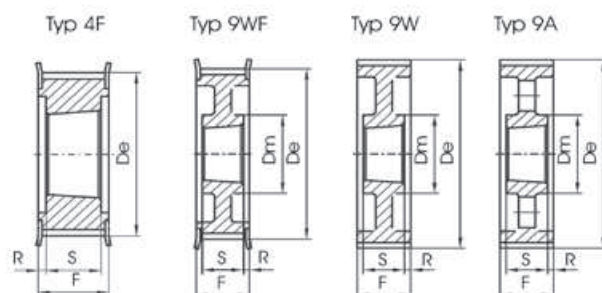

Počet zubů -označení	Hlavový průměr ozubení	Vnější průměr čel	Tvar	Vložka	Max. průměr hřídele	Dm	F	S	R	Hmotnost kg
-------------------------	------------------------------	-------------------------	------	--------	---------------------------	----	---	---	---	----------------


HTD 14M-40 pro řemeny šířky 40 mm

Materiál: šedá litina

PL28-14M-40	122,12	127,0	4F	2012	50	-	54	32	11	2,07
PL29-14M-40	126,57	138,0	4F	2012	50	-	54	32	11	2,38
PL30-14M-40	130,99	138,0	4F	2012	50	-	54	32	11	2,65
PL32-14M-40	139,88	154,0	4F	2012	50	-	54	32	11	3,40
PL34-14M-40	148,79	160,0	4F	2517	60	-	54	45	4,5	3,87
PL36-14M-40	157,68	168,0	4F	2517	60	-	54	45	4,5	4,80
PL38-14M-40	166,60	183,0	4F	2517	60	-	54	45	4,5	5,40
PL40-14M-40	175,49	188,0	4F	2517	60	-	54	45	4,5	6,00
PL44-14M-40	193,28	211,0	4F	3020	75	-	54	51	1,5	7,80
PL48-14M-40	211,11	226,0	4F	3020	75	-	54	51	1,5	9,40
PL56-14M-40	246,76	256,0	9WF	3020	75	170	54	51	1,5	10,80
PL64-14M-40	282,41	296,0	9WF	3020	75	170	54	51	1,5	13,40
PL72-14M-40	318,06	-	9W	3020	75	170	54	51	1,5	15,20
PL80-14M-40	353,71	-	9A	3020	75	170	54	51	1,5	16,00
PL90-14M-40	398,28	-	9A	3020	75	170	54	51	1,5	17,80
PL112-14M-40	496,32	-	9A	3020	75	170	54	51	1,5	25,60
PL144-14M-40	638,92	-	9A	3020	75	170	54	51	1,5	32,00
PL168-14M-40	745,87	-	9A	3020	75	170	54	51	1,5	44,00
PL192-14M-40	852,82	-	9A	3020	75	170	54	51	1,5	49,00
PL216-14M-40	959,76	-	9A	3020	75	170	54	51	1,5	55,00

Řemenice HTD 14M

standardní program PL

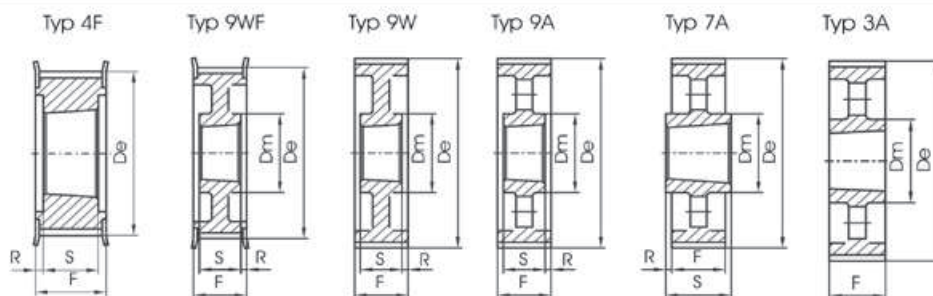

Počet zubů -označení	Hlavový průměr ozubení	Vnější průměr čel	Tvar	Vložka	Max. průměr hřídele	Dm	F	S	R	Hmotnost kg
-------------------------	------------------------------	-------------------------	------	--------	---------------------------	----	---	---	---	----------------

HTD 14M-55 pro řemeny šířky 55 mm

Materiál: šedá litina

PL 28-14M-55	122,12	127	4F	2012	50	-	70	32	19	2,20
PL 29-14M-55	126,57	138	4F	2012	50	-	70	32	19	2,74
PL 30-14M-55	130,99	138	4F	2517	60	-	70	45	12,5	2,70
PL 32-14M-55	139,88	154	4F	2517	60	-	70	45	12,5	3,66
PL 34-14M-55	148,79	160	4F	2517	60	-	70	45	12,5	4,55
PL 36-14M-55	157,68	168	4F	2517	60	-	70	45	12,5	5,20
PL 38-14M-55	166,60	183	4F	2517	60	-	70	45	12,5	6,20
PL 40-14M-55	175,49	188	4F	2517	60	-	70	45	12,5	7,00
PL 44-14M-55	193,28	211	4F	3020	75	-	70	51	9,5	8,60
PL 48-14M-55	211,11	226	4F	3020	75	-	70	51	9,5	10,40
PL 56-14M-55	246,76	256	9WF	3020	75	170	70	51	9,5	12,00
PL 64-14M-55	282,41	296	9WF	3020	75	170	70	51	9,5	14,50
PL 72-14M-55	318,06	-	9W	3020	75	170	70	51	9,5	16,20
PL 80-14M-55	353,71	-	9A	3020	75	170	70	51	9,5	17,50
PL 90-14M-55	398,28	-	9A	3020	75	170	70	51	9,5	20,10
PL 112-14M-55	496,32	-	9A	3020	75	170	70	51	9,5	28,40
PL 144-14M-55	638,92	-	9A	3020	75	170	70	51	9,5	36,20
PL 168-14M-55	745,87	-	9A	3020	75	170	70	51	9,5	49,00
PL 192-14M-55	852,82	-	9A	3020	75	170	70	51	9,5	53,00
PL 216-14M-55	959,76	-	7A	3535	90	190	70	89	9,5	65,80


HTD 14M-85 pro řemeny šířky 85 mm

Materiál: šedá litina

PL 28-14M-85	122,12	127	4F	2517	60	-	102	45	28,5	2,70
PL 29-14M-85	126,57	138	4F	2517	60	-	102	45	28,5	3,40
PL 30-14M-85	130,99	138	4F	2517	60	-	102	45	28,5	3,75
PL 32-14M-85	139,88	154	4F	2517	60	-	102	45	28,5	4,80
PL 34-14M-85	148,79	160	4F	2517	60	-	102	45	28,5	6,00
PL 36-14M-85	157,68	168	4F	3020	75	-	102	51	25,5	5,80
PL 38-14M-85	166,60	183	4F	3020	75	-	102	51	25,5	6,80
PL 40-14M-85	175,49	188	4F	3020	75	-	102	51	25,5	8,00
PL 44-14M-85	193,28	211	4F	3030	75	-	102	76	13,0	11,80
PL 48-14M-85	211,11	226	4F	3030	75	-	102	76	13,0	15,10
PL 56-14M-85	246,76	256	4F	3525	90	190	102	65	18,5	19,00
PL 64-14M-85	282,41	296	9WF	3525	90	190	102	65	18,5	23,00
PL 72-14M-85	318,06	-	9W	3525	90	190	102	65	18,5	25,00
PL 80-14M-85	353,71	-	9A	3525	90	190	102	65	18,5	26,00
PL 90-14M-85	398,28	-	9A	3525	90	190	102	65	18,5	27,80
PL 112-14M-85	496,32	-	9A	3525	90	190	102	65	18,5	36,50
PL 144-14M-85	638,92	-	9A	3525	90	190	102	65	18,5	48,00
PL 168-14M-85	745,87	-	9A	3525	90	190	102	65	18,5	60,00
PL 192-14M-85	852,82	-	3A	4040	100	230	102	102	-	86,00
PL 216-14M-85	959,76	-	3A	4040	100	230	102	102	-	91,50

Řemenice HTD 14M

standardní program PL

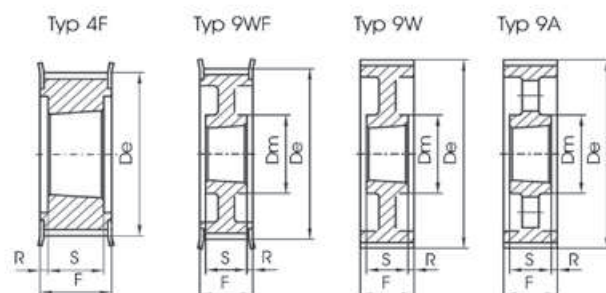

Počet zubů -označení	Hlavový průměr ozubení	Vnější průměr čel	Tvar	Vložka	Max. průměr hříděle	Dm	F	S	R	Hmotnost kg
-------------------------	------------------------------	-------------------------	------	--------	---------------------------	----	---	---	---	----------------

HTD 14M-115 pro řemeny šířky 115 mm

Materiál: šedá litina

PL 28-14M-115	122,12	127	4F	2517	60	-	133	45	44	3,77
PL 29-14M-115	126,57	138	4F	2517	60	-	133	45	44	4,00
PL 30-14M-115	130,99	138	4F	2517	60	-	133	45	44	5,00
PL 32-14M-115	139,88	154	4F	2517	60	-	133	45	44	6,80
PL 34-14M-115	148,79	160	4F	2517	60	-	133	45	44	6,80
PL 36-14M-115	157,68	168	4F	3020	75	-	133	51	41,0	7,00
PL 38-14M-115	166,60	183	4F	3020	75	-	133	51	41,0	8,40
PL 40-14M-115	175,49	188	4F	3020	75	-	133	51	41,0	9,20
PL 44-14M-115	193,28	211	4F	3030	75	-	133	76	28,5	14,00
PL 48-14M-115	211,11	226	4F	3030	75	-	133	76	28,5	17,10
PL 56-14M-115	246,76	256	4F	3535	90	-	133	89	22,0	24,80
PL 64-14M-115	282,41	296	9WF	3535	90	190	133	89	22,0	27,00
PL 72-14M-115	318,06	-	9W	3535	90	190	133	89	22,0	29,00
PL 80-14M-115	353,71	-	9A	3535	90	190	133	89	22,0	32,00
PL 90-14M-115	398,28	-	9A	3535	90	190	133	89	22,0	36,50
PL 112-14M-115	496,32	-	9A	3535	90	190	133	89	22,0	46,00
PL 144-14M-115	638,92	-	9A	4040	100	230	133	102	15,5	68,00
PL 168-14M-115	745,87	-	9A	4040	100	230	133	102	15,5	82,60
PL 192-14M-115	852,82	-	9A	4040	100	230	133	102	15,5	96,00
PL 216-14M-115	959,76	-	9A	4040	100	230	133	102	15,5	107,00

HTD 14M-170 pro řemeny šířky 170 mm

Materiál: šedá litina

PL 38-14M-170	166,60	183	4F	3030	75	-	187	76	55,5	11,70
PL 40-14M-170	175,49	188	4F	3030	75	-	187	76	55,5	13,00
PL 44-14M-170	193,28	211	4F	3535	90	-	187	89	49,0	15,00
PL 48-14M-170	211,11	226	4F	3535	90	-	187	89	49,0	19,00
PL 56-14M-170	246,76	256	4F	3535	90	-	187	89	49,0	28,50
PL 64-14M-170	282,41	296	4F	4040	100	-	187	102	42,5	41,00
PL 72-14M-170	318,06	-	9W	4040	100	230	187	102	42,5	46,90
PL 80-14M-170	353,71	-	9W	4040	100	230	187	102	42,5	48,00
PL 90-14M-170	398,28	-	9A	4040	100	230	187	102	42,5	52,50
PL 112-14M-170	496,32	-	9A	5050	125	265	187	127	30,0	74,50
PL 144-14M-170	638,92	-	9A	5050	125	265	187	127	30,0	91,00
PL 168-14M-170	745,87	-	9A	5050	125	265	187	127	30,0	116,00
PL 192-14M-170	852,82	-	9A	5050	125	265	187	127	30,0	134,00
PL 216-14M-170	959,76	-	9A	5050	125	265	187	127	30,0	146,50

Upínací kuželová pouzdra TLB

Označení pouzdra	vrtání pro hřídel	Drážka P9	Délka pouzdra	Největší průměr kuželu
1008	10	3	22,3	35,0
	11 12	4		
	14 16	5		
	18 19 20 22	6		
	24 25	8*		
1108	10	3	22,3	38,0
	11 12	4		
	14 16	5		
	18 19 20 22	6		
	24 25	8		
1210	11 12	4	25,4	47,5
	14 16	5		
	18 19 20 22	6		
	24 25 28	8		
	30 32	10		
1310	14 16	5	25,4	51,0
	18 19 20 22	6		
	24 25 28 30	8		
	32	10		
	35	10*		
1610	14 15 16	5	25,4	57,0
	18 19 20 22	6		
	24 25 28 30	8		
	32 35 38	10		
	40 42	12		
1615	14 16	5	38,1	57,0
	18 19 20 22	6		
	24 25 28 30	8		
	32 35 38	10		
	40 42	12*		
2012	14 16	5	31,8	70,0
	18 19 20 22	6		
	24 25 28 30	8		
	32 35 38	10		
	40 42	12		
2517	16	5	44,5	85,5
	18 19 20 22	6		
	24 25 28 30	8		
	32 35 38	10		
	40 42	12		
	45 48 50	14		
3020	25 28 30	8	50,8	108,0
	32 35 38	10		
	40 42	12		
	45 48 50	14		
	55	16		
3030	35 38	10	76,2	108,0
	40 42	12		
	45 48 50	14		
	55	16		
	60 65	18		

Označení pouzdra	vrtání pro hřídel	Drážka P9	Délka pouzdra	Největší průměr kuželu
3525	35 38	10	64,0	127
	40 42	12		
	45 48 50	14		
	55	16		
	60 65	18		
	70 75	20		
	80 85	22		
	90 95	25		
3535	100	28*	88,9	127
	35 38	10		
	40 42	12		
	45 48 50	14		
	55	16		
	60 65	18		
	70 75	20		
	80 85	22		
4030	90	25	76,0	146
	40 42	12		
	45 48 50	14		
	55	16		
	60 65	18		
	70 75	20		
	80 85	22		
	90 95	25		
4040	100 105 110	28	101,6	146
	115	32*		
	40 42	12		
	45 48 50	14		
	55	16		
	60 65	18		
	70 75	20		
	80 85	22		
4535	90 95	25	89,0	162
	100 105 110	28		
	115 120 125	32		
	55	16		
	60 65	18		
	70 75	20		
	80 85	22		
	90 95	25		
4545	100 105 110	28	114,3	162
	55	16		
	60 65	18		
	70 75	20		
	80 85	22		
5040	90 95	25	102,0	178
	100 105 110	28		
	115 120 125	32		
	70 75	20		
	80 85	22		
	90 95	25		
5050	100 105 110	28	127,0	178
	115 120 125	32		
	70 75	20		
	80 85	22		
	90 95	25		

* Drážka s hloubkou pro ploché pero